



Custom 2" Wood Blind

Model #WOOD2

The designer's choice for elegant, traditional window treatments.



KEY FEATURES:

- Finest premium kiln-dried hardwood construction
- Matching valance, bottomrail, wand and matching tassel
- One year warranty

PRODUCT OVERVIEW

Levolor Custom 2" Wood Blinds create the look of expensive plantation shutters while offering excellent light control and privacy. Committed to both durability and aesthetics, the Levolor Custom 2" Wood Blind combines the highest quality components with visibly attractive features to provide an overall superior product.


Levolor Custom 2" Wood Blinds are made from the finest kiln-dried premium quality hardwood. Furniture quality wood finishes are available in two surface textures and a palette of more than 35 paints, stains, washes and specialty finishes, ranging from contemporary light to rich traditional dark tones. The standard finish is sanded smooth on all surfaces resulting in a quality blind free of chips, cracks and sawmarks. The Levolor Sandblasted finish is beautifully enhanced by a special process which raises the natural grain of the wood.

Levolor Custom 2" Wood blinds use a proven, low profile headrail system made of roll-formed corrosion-resistant Tomized steel. The metal headrail and precision quality components provide superior support for the additional weight demands imposed by wood blinds. The precision molded thermoplastic drums and cradles insure accurate alignment of moving parts, smooth and maintenance-free operation.

Valance returns have a precise mitered joint secured with an easy-to-assemble return clip. The premium hardwood slats, bottomrails, and styled valances, are color coordinated with cords, ladders, wands and tassels to provide an elegant wood window covering.



Custom 2" Wood Blind

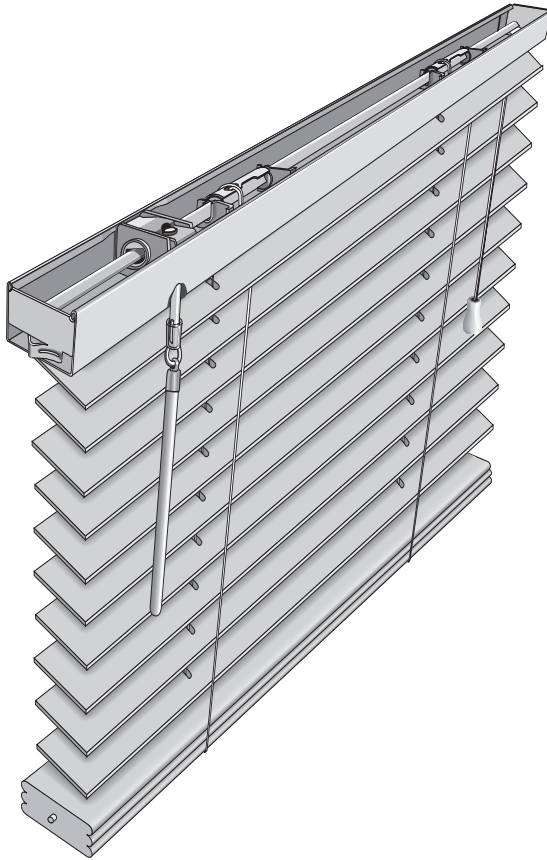

PRODUCT SPECIFICATIONS

For more detailed specifications please reference Custom 2" Wood Blind product Guide Specifications.

Part II – Products

A. Custom 2" Wood Blind manufactured by Levolor

B. One Year Warranty

C. Materials:

- n **Headrail** shall be of .025" thick Tomized steel, "U" shaped, 1.5" high x 2-1/4" wide. All hardware shall be enclosed in the metal headrail.
- n **Tilt Wand** shall be of polymer, with a .38" diameter.
- n **Cord Lock** shall be .032" thick galvanized steel and shall be crashproof.
- n **Drum and Cradle** shall be provided for each ladder.
 - a. **Drums:**
Traditional rout hole drums are .020" thick galvanized steel. Cloth tape drums are injection molded thermoplastic.
 - b. **Cradles** are injection molded thermoplastic.
- n **Installation Brackets** shall be of at least .040" thick Tomized steel with a rivet-hinged safety locking front cover to permit removal of headrail without lateral movement.
- n **Ladders** (slat supports): Distance between 2" slats shall not exceed 44 mm (nominally 6.9 slats per vertical foot).
- n **Slats** shall be of premium quality hardwood finished with a wood stain or solid coating selected from Levolor Custom colors, sealed, and lacquered. Maximum slat length is 96". Standard 2" slats are nominally 2" wide x 1/8" high.
- n **Bottomrail** shall be nominally 2" wide x 5/8" high and finished to coordinate with slats.
- n **Options** shall include:
 - a. Cord tilter
 - b. Radius corners
 - c. Twill tapes
 - d. LightMaster™ privacy feature



Levolor Contract
4110 Premier Drive
High Point, NC 27265

Contract Customer Service
1-800-826-8021
www.levolorcontract.com

© Copyright 2004 Levolor. All rights reserved. US and non-US patents and patents pending. Product specifications are subject to change without notice. Printed in the USA.

R0203044